


ECOSYS FS-1035MFP/DP ECOSYS FS-1135MFP







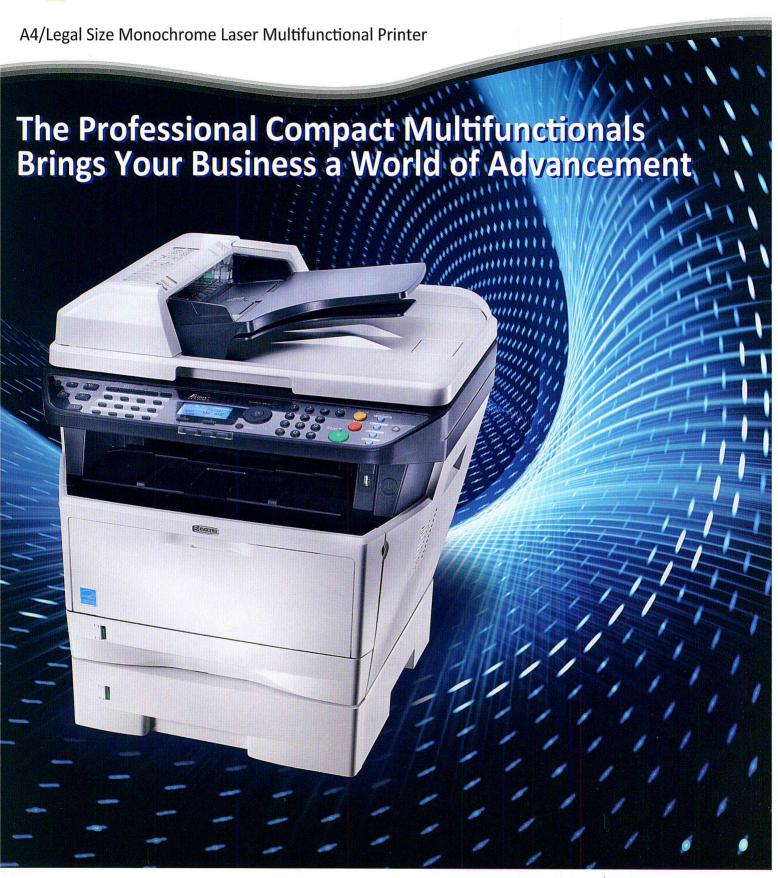










Born to be Extraordinary


Kyocera Mita is Extraordinary for


- Broad Range of Multifunctional Devices and Printers
- Optimized Total Cost of Ownership (TCO)
- Reliable with Long Life Drum and Parts
- New and Advanced Technology

KYOCERA MITA strives to be a Company that contributes to the society and demonstrates "Customer First" principle by providing customers with maximum value to increase their satisfaction. By adhering to the mission of producing document management devices that take balance between "Economy" and "Ecology", KYOCERA MITA succeeds to develop document management devices with advanced technologies which help customers to optimize office productivity and efficiency at a low Total Cost of Ownership and, at the same time, improving environmental performance.

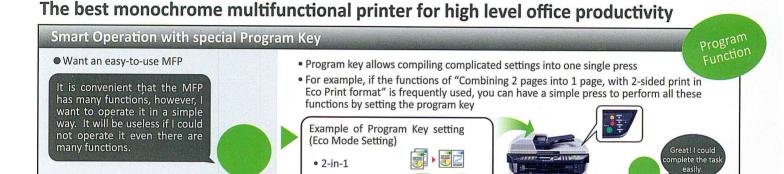

2-sided printEco Print

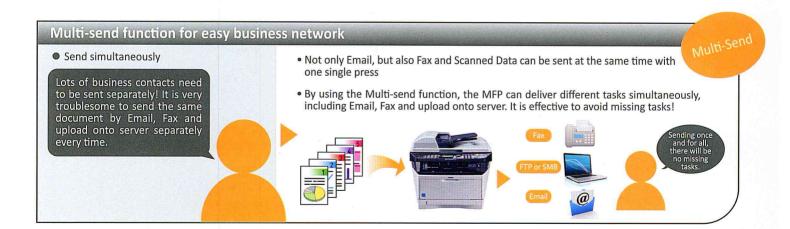

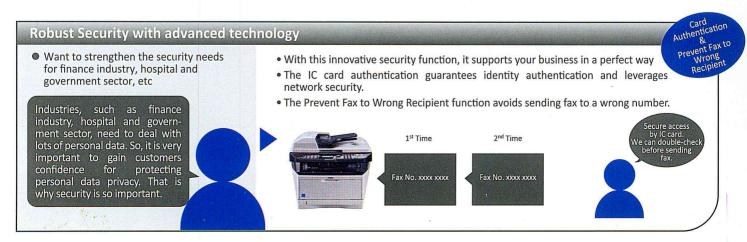


PRODUCT

Born to be long-life with the **ECOSYS** Concept

Reduce operating costs with long life consumables

2-sided copy/print as standard



Handle up to 800 sheets with maximum 2 additional paper

1 - sided > 2 - sided cassettes



Easy-to-view and easy-tonavigate LCD panel

Compile frequently use functions into one single press - 4 program



Document could be easily noticed by blackish blue output





ECOSYS FS-1035MFP/DP **ECOSYS FS-1135MFP**

Convert business document to e-format by high speed color scan

Scan data directly into USB memory - Scan to USB

Send directly by email attachment -Scan to Email

Store scanned data to FTP server-Scan to FTP

Save document into specific folder on a network PC - Scan to SMB



Top class first copy time with only 6.9 seconds

Continuous copy / print:

35 pages / minute (A4)



Network interface as standard

Save toner consumption and cost with Eco Print function



Direct print from USB memory



Save cost by using less paper

- Print: Allow 25-in-1
- Copy: Allow 4-in-1





Fast fax sending and receiving



Capable of sending and receiving fax on PC with network fax function



Set permission for fax-in and fax-out to registered numbers only

Prevent fax to wrong recipient for important documents

Fax broadcast up to 100 different destinations

SECURITY

Adopt IC Card to facilitate authentication management among departments




KMnet Viewer and Webbased Kyocera Command Center enable administrator to easily manage, monitor and edit the device settings network remotely



Sophisticated network security as standard -SSL

-IPsec

Prevent improper access



Private Print Function** enables secure print jobs with password request at the device

**Expanded RAM Memory is required

KMnet Policy Manager (optional) enhances efficiency authentication management and flexibility of simple "Follow-me Print" via the network simultaneously



Registered under Energy Star program for low energy consumption



Fulfilled the requirements of RoHS (Restriction of Hazardous Substances) set by the European Union.

A SO WAS DO

Usage of lead-free parts, such as lead-free electric wire and lead-free solder

Only use parts which meet the requirement of environmental protection regulation

DOW DOWN

| General Speci | fications | ECOSYS FS-1035MFP/DP | ECOSYS FS-1135MFP | |
|--|-------------------|--|-------------------|--|
| Туре | | Desktop | | |
| Printing Method | | Semiconductor Laser | | |
| Main Function | | Copy, Print, Scan Copy, Print, Scan, Fax | | |
| Warm Up Time | | 20 seconds or less | | |
| CPU | | PowerPC 440/ 667 MHz | | |
| Memory | | Standard 256MB (Maximum 768MB: 256MB + 512MB) | | |
| Paper Capacity | Standard | 300 sheets (250 sheet cassette + 50 sheet MPT) | | |
| | Maximum | 800 sheets (Standard + 250 sheet PF-120 x 2) | | |
| Paper Size | Cassette (Std.) | A4, A5, A6, B5, Letter, Legal, Custom (105 x 148 to 216 x 297mm) | | |
| | Cassette (Opt.) | A4, A5, B5, Letter, Legal, Custom (148 x 210 to 216 x 297mm) | | |
| | MPT | A4, A5, A6, B5, Letter, Legal, Custom (70 x 148 to 216 x 356mm) | | |
| | Duplex | A4, Letter, Legal | , Folio, Oficio2 | |
| Paper Weight | Cassette | 60 to 120 g/m ² | | |
| | MPT | 60 to 220 g/m ² | | |
| | Duplex | 60 to 105 g/m ² | | |
| | Document | Simplex Scan : 50 to 120 g/m ² | | |
| | Processor | Duplex Scan: 50 to 110 g/m ² | | |
| Output Capacity | | Max. 150 sheets face-down | | |
| Duplex Unit | | Duplex as standard | | |
| Automatic Document Processor | | Standard (Max. 50 sheet) | | |
| Control Panel | | 5 lines LCD Panel | | |
| Power Source | | AC 220 – 240 V, 50/60 Hz | | |
| Power | Printing/Copying | 497.1W | 501.7W | |
| Consumption (Standard configuration) | Stand-by | 79.6W | 83.9W | |
| | Sleep-mode | 7.8W | 10.6W | |
| Noise (ISO7779/ ISO9296) | Copying/ Printing | 55dB(A) | | |
| | Stand-by | 30dB(A) | | |
| Dimension (W x D x H) (Main Unit) | | 494mm x 430mm x 448mm | | |
| Weight (Main Un | it) | Approx. 18kg | | |

| Print Functions | ECOSYS FS-1035MFP/DP and ECOSYS FS-1135MFP |
|----------------------------|---|
| Print Speed (A4) | 35 pages per minute |
| Time to First Print | 7.0 seconds or less |
| Resolution | Fine 1200, Fast 1200, 600dpi, 300dpi |
| PDL | PRESCRIBE, PCL6(5e,XL), KPDL3 (PostScript 3 compatible), Line Printer, IBM Proprinter X24E, Epson LQ-850, Diablo 630, PDF, XPS |
| Supported Protocol | TCP/IP, Netware, AppleTalk, NetBEUI |
| Operating System Supported | Windows 2000/XP/Vista/7/Server 2003/Server 2008; MAC OS X 10.4 or later; Linux |
| Standard Interface | High Speed USB 2.0, USB Host 2.0, Ethernet 10BASE-T/100BASE-TX |
| USB Memory Printing | Standard |
| USB Memory Printing Format | TIFF, PDF, XPS |

| Scan Functions | | ECOSYS FS-1035MFP/DP and ECOSYS FS-1135MFP | |
|----------------------|-----------|--|--|
| Scan Speed | A4 300dpi | 35 ipm (Mono); 14 ipm (Color) | |
| | A4 600dpi | 20 ipm (Mono); 7 ipm (Color) | |
| Max. Scan size | | A4/ Legal | |
| Resolution | | 600dpi, 400dpi, 300dpi, 200dpi, 200 x 400dpi, 200 x 100dpi | |
| Original Recognition | | Text, Photo, Text + Photo, OCR | |
| File Format | | TIFF, PDF, JPEG, XPS | |
| Transmission Type | | Scan to SMB; Scan to Email; Scan to FTP; Scan to USB; WSD Scan | |
| Standard Interface | | USB Host, 10BASE-T/100BASE-TX | |

| Copy Function | ons | ECOSYS FS-1035MFP/DP and ECOSYS FS-1135MFP | |
|-------------------------------|---------------------------|--|--|
| Copy Speed (A4) | | 35 pages per minute | |
| Original Size | | Max. A4 / Legal | |
| Resolution | | 600 x 600dpi | |
| Time to First Copy | | 6.9 seconds or less | |
| Zoom Ratio Manual Pre-defined | 25% to 400% (1% per Step) | | |
| | Pre-defined | 7 Reductions / 5 Enlargements | |
| Multiple Copy | | 1 to 999 | |

| Fax Functions | | ECOSYS FS-1135MFP Only | |
|----------------------|-----------|---|--|
| Transmission Method | Parkin | SuperG3 (Max. 33.6 kbps) | |
| Transmission Speed | | Less than 3 seconds | |
| Original Size | | Max. A4/ Legal | |
| Fax Scanning Density | Normal | 200 x 100dpi (8 dot/mm x 3.85 line/mm) | |
| | Fine | 200 x 200dpi (8 dot/mm x 7.7 line/mm) | |
| | Superfine | 200 x 400dpi (8 dot/mm x 15.4 line/mm) | |
| | Ultrafine | 400 x 400dpi (16 dot/mm x 15.4 line/mm) | |
| | Halftone | alftone 256 greyscales | |
| Compression Method | | MMR, MR, MH, JBIG | |
| One Touch Dial | | 22 addresses | |
| Group Dial | | 20 addresses | |
| Address Book | | 100 entries | |
| Network FAX | | Supported | |

| Consumables | ECOSYS FS-1035MFP/DP and ECOSYS FS-1135MFP |
|---|--|
| Toner Kit (Page Yield in accordance with ISO/IEC 19752) | TK-1144: 7,200 pages |
| Capacity of Start up Toner | 3,600 pages |
| Maintenance Kit | MK-1144 |


| Options | ECOSYS FS-1035MFP/DP and ECOSYS FS-1135MFP |
|---------------------|---|
| Paper Feeder | Up to two PF-120 (250 sheets) |
| Ethernet Board | IB-23: For Additional Network (for ECOSYS FS-1035MFP/DP only) |
| Card Authentication | Card Authentication Kit (B) / (B) AC + IC Card Reader |







ECOSYS FS-1035MFP/DP and ECOSYS FS-1135MFP





Unit: Millimeter (mm)



Kyocera Mita (Thailand) Corp., Ltd. 335 Ratchadapisek Rd., Bangsue, Bangkok 10800 Tel. 02 586 0333 Fax. 02 586 0278, 02 910 8710

www.kyoceramita.co.th

*KYOCERA does not warrant that any specifications mentioned will be error-free. Specifications are subject to change without notice. Information is correct at time of going to press. All other brand and product names may be registered trademarks or trademarks of their respective holders and are hereby acknowledged.

KYOCERA Business Partner